

SAK-355-5/03

3 PHASE 4 WIRE GENERAL PURPOSE POWER LINE FILTERS



In Conformation with
EMC Directive 2014/30/EU
Low Voltage Directive 2014/35/EU


RoHS
Compliant





SPECIFICATIONS

Rated Voltage :	440 V,3 PH,4 WIRE,50/60Hz
Rated current :	20A at temp 40 C
Test Voltage :	2000 V dc between Line to earth for 2Secs.
Insulation Resistance :	> 100 M Ohm between mains terminals shorted together & earth at 500 V DC.
Leakage Current :	3 mA max at Normal Condition
Operating Temperature Range :	0 to 85 Celcius

CIRCUIT DIAGRAM

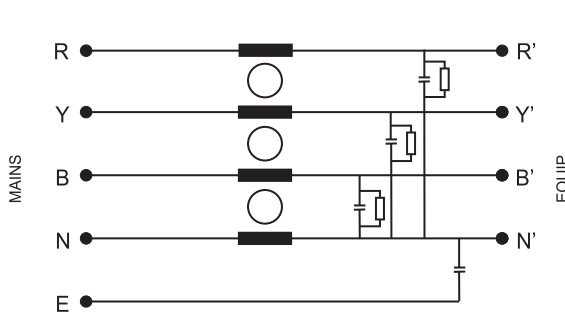

Common Mode Insertion Loss

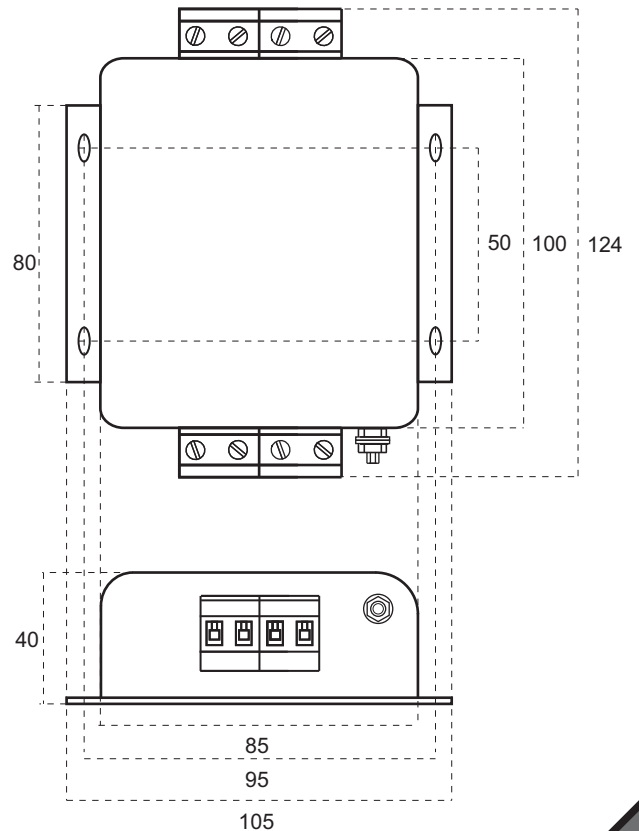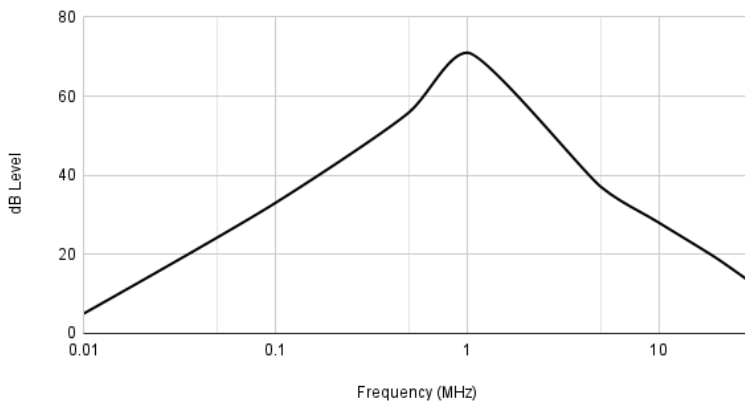

Material : MS, Plating : Nickle

DRG-REF: M1-0924

E-mail: sakura.rane@gmail.com

Visit Us: www.sakuraindia.com

Mobile: +91 98693 32286

E-mail: sakuraradhika@gmail.com

Whatsapp : +91 98204 26920

Contact
Us