

### SAK-356-250/03

3 PHASE 4 WIRE GENERAL PURPOSE POWER LINE FILTERS




In Conformation with  
EMC Directive 2014/30/EU  
Low Voltage Directive 2014/35/EU

RoHS  
Compliant



#### SPECIFICATIONS

<b>Rated Voltage :</b>	440 V,3 PH,4 WIRE,50/60Hz
<b>Rated current :</b>	250A at temp 40 C
<b>Test Voltage :</b>	2000 V dc between Line to earth for 2Secs.
<b>Insulation Resistance :</b>	> 100 M Ohm between mains terminals shorted together & earth at 500 V DC.
<b>Leakage Current :</b>	3 mA max at Normal Condition
<b>Operating Temperature Range :</b>	0 to 85 Celcius

CIRCUIT DIAGRAM

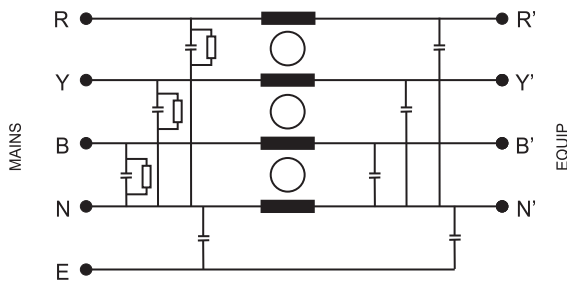

Common Mode Insertion Loss

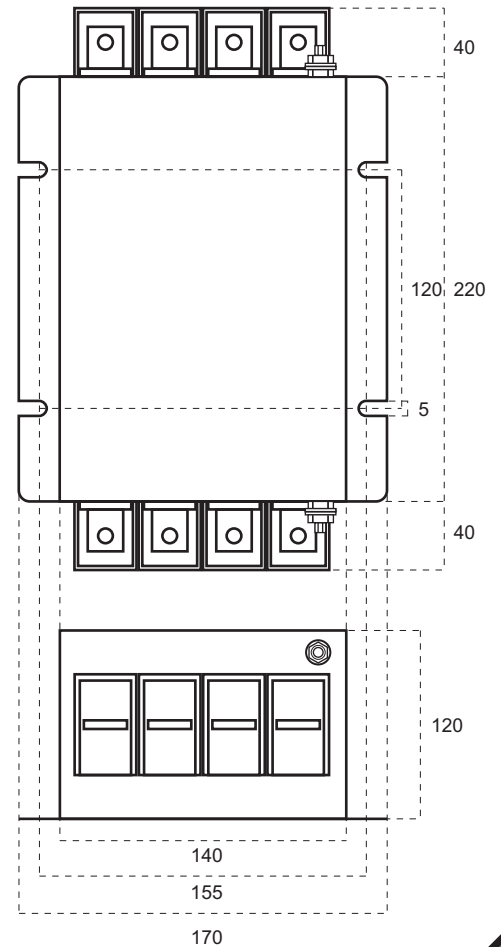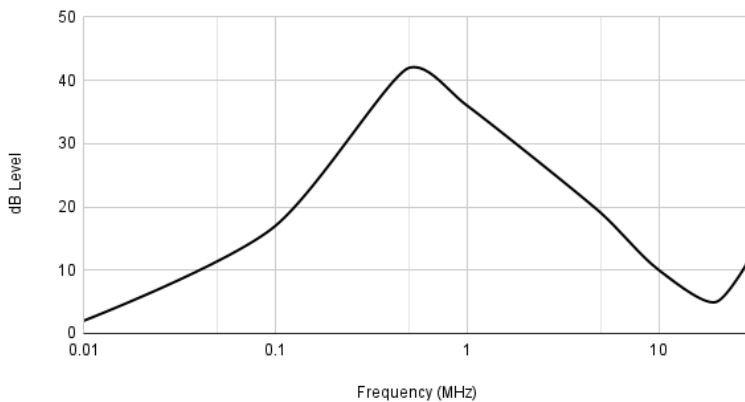

Material : MS, Plating : Nickel

DRG-REF: M1-0924

E-mail: sakura.rane@gmail.com

Visit Us: www.sakuraindia.com

Mobile: +91 98693 32286

E-mail: sakuraradhika@gmail.com

Whatsapp : +91 98204 26920

Contact  
Us