

SAK-356-80/03

3 PHASE 4 WIRE GENERAL PURPOSE POWER LINE FILTERS




In Conformation with
EMC Directive 2014/30/EU
Low Voltage Directive 2014/35/EU

RoHS
Compliant



SPECIFICATIONS

| | |
|--------------------------------------|---|
| Rated Voltage : | 440 V,3 PH,4 WIRE,50/60Hz |
| Rated current : | 80A at temp 40 C |
| Test Voltage : | 2000 V dc between Line to earth for 2Secs. |
| Insulation Resistance : | > 100 M Ohm between mains terminals shorted together & earth at 500 V DC. |
| Leakage Current : | 3 mA max at Normal Condition |
| Operating Temperature Range : | 0 to 85 Celcius |

CIRCUIT DIAGRAM

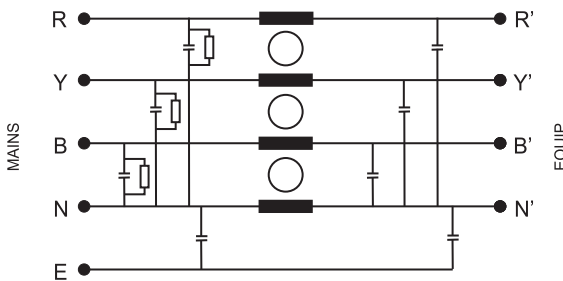

Common Mode Insertion Loss

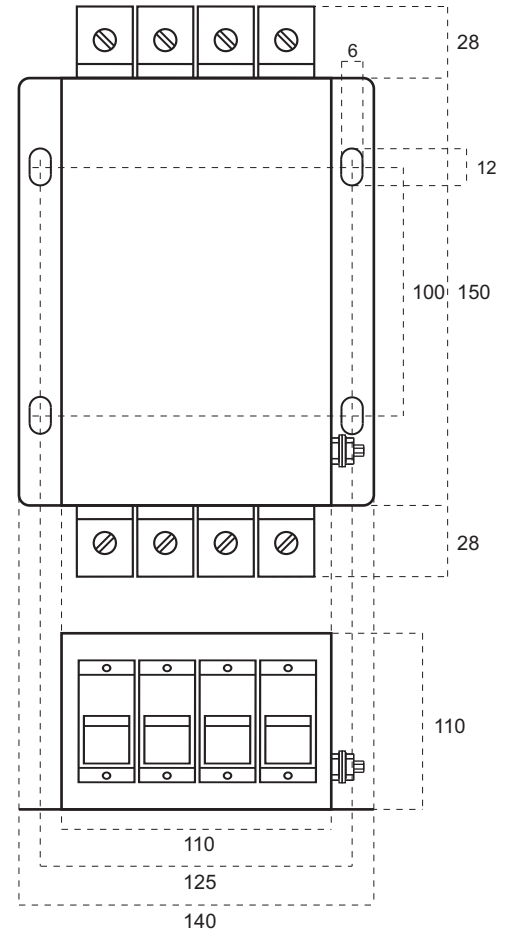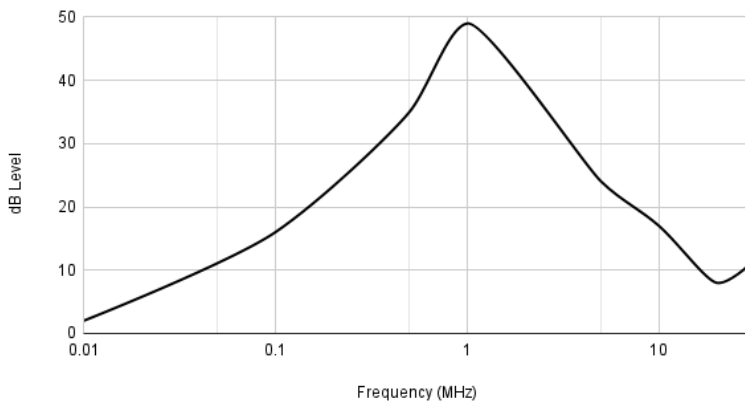

Material : MS, Plating : Nickel

DRG-REF: M1-0924

E-mail: sakura.rane@gmail.com

Visit Us: www.sakuraindia.com

Mobile: +91 98693 32286

E-mail: sakuraradhika@gmail.com

Whatsapp : +91 98204 26920

Contact
Us