

## SAK-612-20

SINGLE PHASE POWER LINE FILTERS IN DEEP DRAWN METAL BOX




In Conformation with  
EMC Directive 2014/30/EU  
Low Voltage Directive 2014/35/EU

RoHS  
Compliant



### SPECIFICATIONS

<b>Rated Voltage :</b>	250V, 50/60Hz
<b>Rated current :</b>	20A at room temp 40 C
<b>Test Voltage :</b>	2000V dc between Line to earth for 2 Secs.
<b>Insulation Resistance :</b>	>100 M Ohm between mains terminals shorted together & earth at 500 VDC.
<b>Leakage Current :</b>	1 mA max at Normal Condition.
<b>Temperature Range :</b>	0 to 85 C

### CIRCUIT DIAGRAM

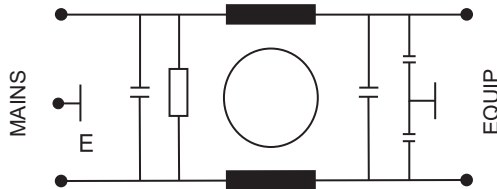

### Common Mode Insertion Loss

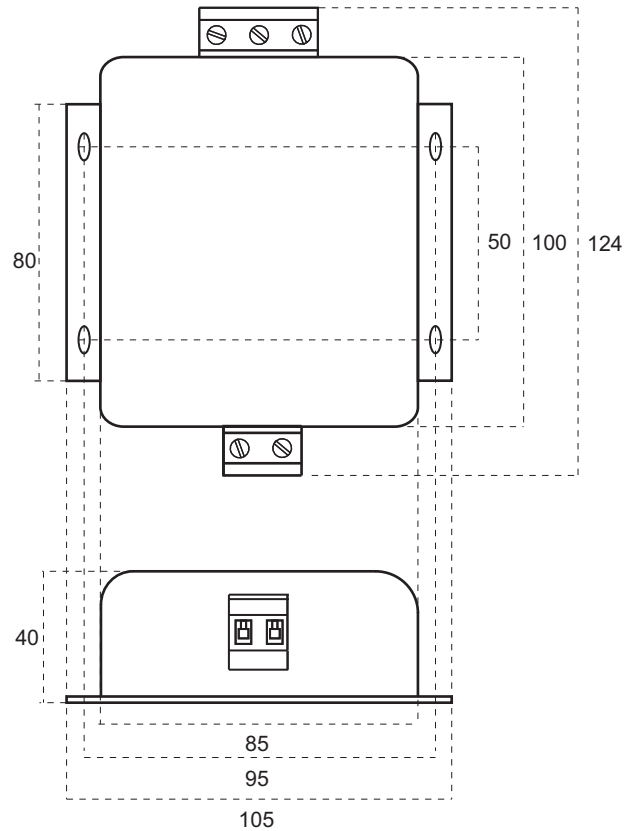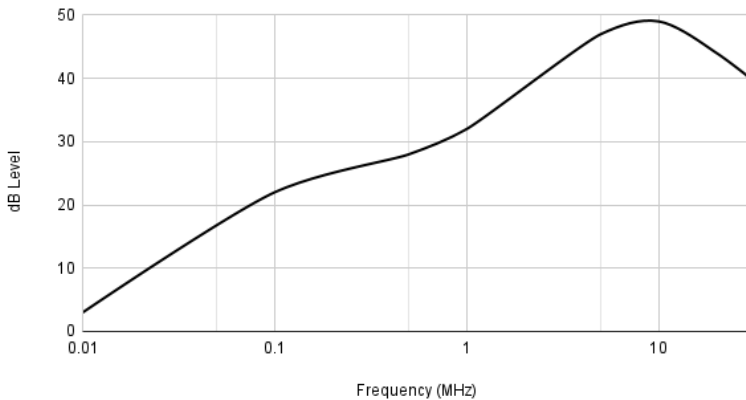

Material : MS, Plating : Nickle

DRG-REF: M1-0924

E-mail: sakura.rane@gmail.com

Visit Us: www.sakuraindia.com

Mobile: +91 98693 32286

E-mail: sakuraradhika@gmail.com

Whatsapp : +91 98204 26920

Contact  
Us