

SAK-615-60

SINGLE PHASE HIGH CURRENT POWER LINE FILTER




In Conformance with
EMC Directive 2014/30/EU
Low Voltage Directive 2014/35/EU

RoHS
Compliant



SPECIFICATIONS

Rated Voltage :	250V AC, 50/60Hz
Rated current :	60A at room temp 40C
Test Voltage :	2000V dc between Mains terminals shorted together & earth for 2 Secs.
Insulation Resistance :	> 100 M Ohm between mains terminals shorted together & earth at 500 V DC.
Leakage Current :	2 * 0.5mA max at Normal Condition.
Operating Temperature Range :	0 to 85 Celcius.

CIRCUIT DIAGRAM

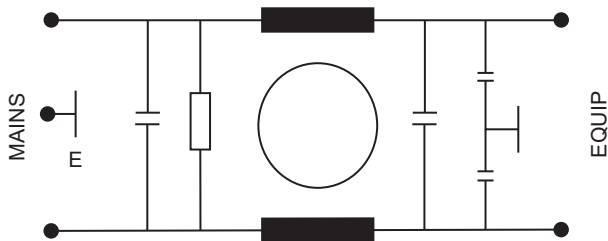

Common Mode Insertion Loss

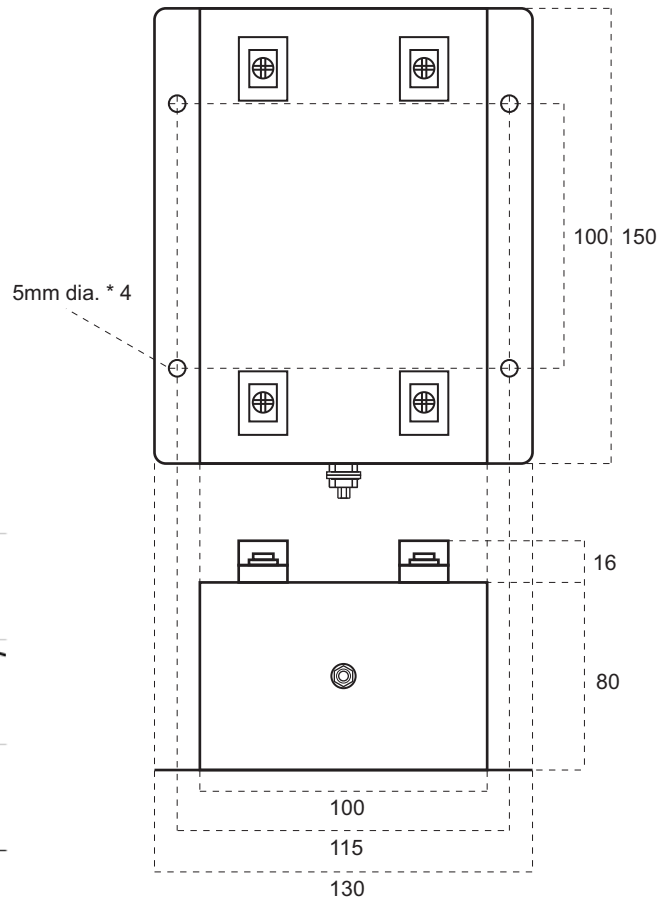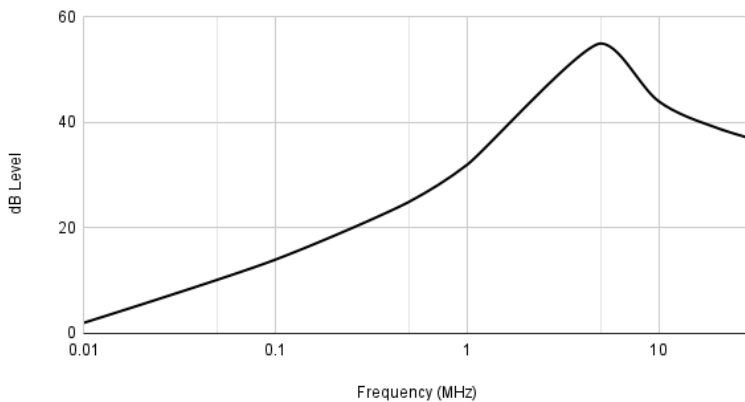

Material : MS, Plating : Nickel

DRG-REF: M1-0924

E-mail: sakura.rane@gmail.com

Visit Us: www.sakuraindia.com

Mobile: +91 98693 32286

E-mail: sakuraradhika@gmail.com

Whatsapp : +91 98204 26920

Contact
Us